


**NOTES:**

1. Inner and outer threads are of the same size and pitch.
2. Filter mount and retaining ring are black anodized aluminum.
3. All dimensions indicated in mm.

Mount Size	A	B	C	D	E
M22.5 x P0.5	24.5	18.5	6.5	4.5	20
M25.5 x P0.5	27.5	21	6.5	4.5	22.5
M27 x P0.5	29	23	7	5	24.5
M30.5 x P0.5	32.5	26	7	5	28
M34 x P0.5	36	30	6.5	5	31.5
M35.5 x P0.5	37	31.5	7	5	33
M37 x P0.75	39	33	7	5	34.2
M37.5 x P0.5	39	33.5	7	5	35
M40.5 x P0.5	42	36	7	5	37.7
M43 x P0.75	45	39.5	6.5	5	40.7
M46 x P0.75	48	41.5	7	5	43.2
M49 x P0.75	51	45	7	5	46
M52 x P0.75	54	47.5	7	5	49
M55 x P0.75	57	50.5	7	5	52
M58 x P0.75	60	53.5	7	5	55
M62 x P0.75	65	57.5	8	5.5	59
M67 x P0.75	70	62.5	8	5.5	64
M72 x P0.75	75	67.5	8	5.5	69
M77 x P0.75	80	73	8	5.5	74.3
M82 x P0.75	84	77.5	8	5.5	80
M86 x P1.0	88	81	10.5	8	84
M95 x P1.0	98	90	11	8	93
M105 x P1.0	110	100	11	8	102

Threaded Retaining Ring,  
1.8mm Nominal Thickness

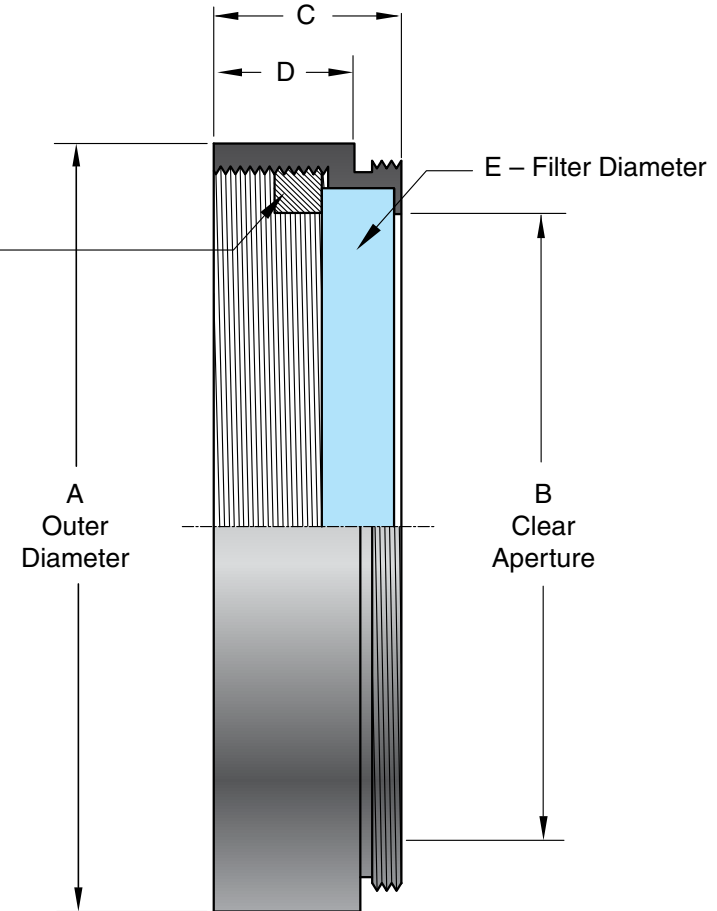

**MIDOPT**

Midwest Optical Systems, Inc.

Machine Vision Filters, Lenses and Accessories

322 Woodwork Lane, Palatine IL 60067

P: 847-359-3550 F: 847-359-3567

www.midopt.com

**Filter  
Mounts**

July 16, 2009